




TECHNICAL SPECIFICATIONS

STANDARD VERSION


Drive system	Screw-driven
Rated load	Up to 400 kg / 5 persons
Speed	0.15 m/sec (9 m/min)
Travel height	Up to 13 metres
Landings	Up to 6
Platform dimensions (length x width, mm)	1100 x 1400 1070 x 1485
*available custom dimensions	1150 x 1485
Shaft dimensions (length x width, mm)	1500 x 1460 1460 x 1540 1540 x 1540
Door clearance (width x height, mm)	900 x 2000 (with 1100 x 1400 platform) 940 x 2000
*available other dimensions	
Gate (width x height, mm)	900 x 1300 (with 1100 x 1400 platform) 940 x 1300
Door configuration	Right or left swing, up to 3 doors per landing
Shaft walls	Aluminium profiles with glass or steel panels
Standard colors	RAL 9010 (pure white) RAL 9006 (light grey aluminum)
*any RAL color available as option	
Soft start/stop	Comes as a standard
Power supply	220-230 V, 1 phase, 40A; 380-400 V, 3 phase, 25A, 50 or 60 Hz
Motor	2.2 kW
Noise level	Less than 70 dB
Control system	Micro computer based
Technical safety equipment	Safety edge around the the platform, emergency STOP buttons, electronic speed control, overload detector, opening control of doors and locks, electronic control of engine performance
Complies with the European platform lifts standard EN81-41:2010	

TECHNICAL SPECIFICATIONS

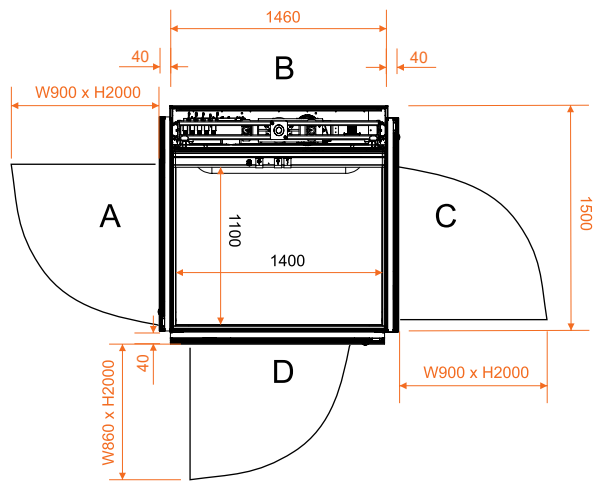


STANDARD PLATFORM LIFT 1100 X 1400

System	Screw-driven
Rated load	400 kg
Speed	0,15 m/sec (9 m/min)
Platform dimensions	1100 x 1400 mm
Shaft dimensions	1500 x 1460 mm
Structural opening	1540 x 1500 mm
Required opening for the door	W (shaft width) x H (decided door height) + 250 mm
Pit	50 mm
Power supply	380V, 3 phase or 230V, 1 phase

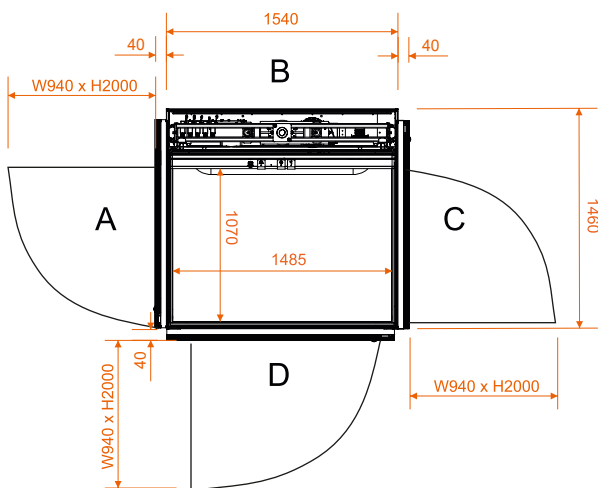

STANDARD PLATFORM LIFT 1070 X 1485

System	Screw-driven
Rated load	400 kg
Speed	0,15 m/sec (9 m/min)
Platform dimensions	1070 x 1485 mm
Shaft dimensions	1460 x 1540 mm
Structural opening	1500 x 1580 mm
Required opening for the door	W (shaft width) x H (decided door height) + 250 mm
Pit	50 mm
Power supply	380V, 3 phase or 230V, 1 phase

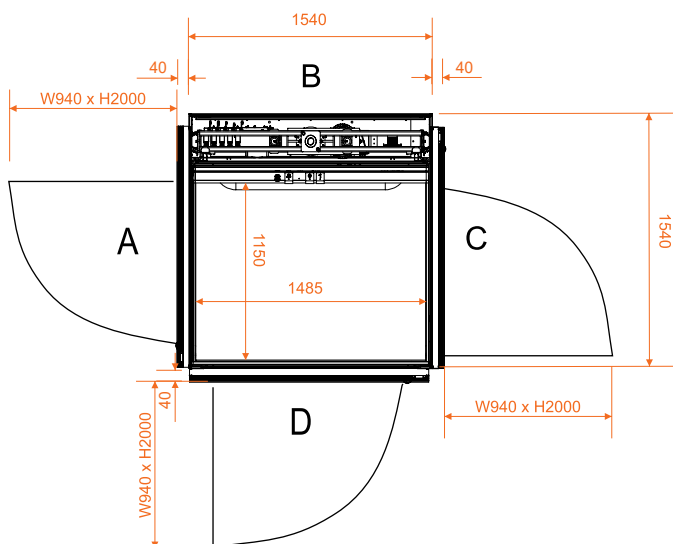

STANDARD PLATFORM LIFT 1150 X 1485

System	Screw-driven
Rated load	400 kg
Speed	0,15 m/sec (9 m/min)
Platform dimensions	1150 x 1485 mm
Shaft dimensions	1540 x 1540 mm
Structural opening	1580 x 1580 mm
Required opening for the door	W (shaft width) x H (decided door height) + 250 mm
Pit	50 mm
Power supply	380V, 3 phase or 230V, 1 phase